


CamiFlex

Camera over Hybrid fiber

One single Hybrid Optical cable is used to transport: Power, Video, Audio, Intercom, Tally and Remote.



Camera side

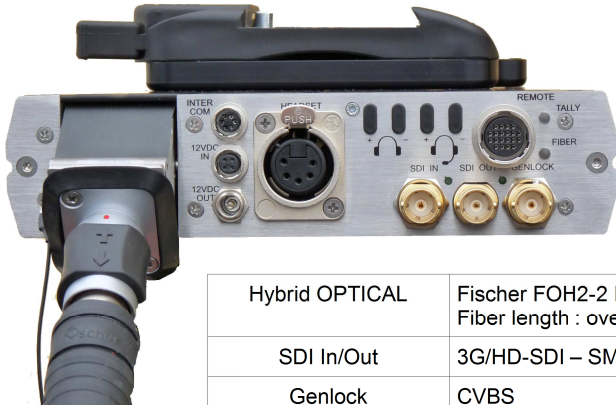

Hybrid OPTICAL	Fischer FOH2-2 R13 plug, Fischer Fiber Optic Hybrid cable : FOH2-2 P01 Fiber length : over 200 meters
SDI In/Out	3G/HD-SDI – SMPTE292M, SMPTE 424M
Genlock	CVBS
Remotes	1 x Hirose 20p connexion for 3xRS and LANC
Tally LED	Red/Yellow LED with option external Tally plug on Jack 3.5mm
12V DC OUTPUT	DC to Camera DC IN
12V DC IN	DC to CamiFlex for use with no hybrid optical fiber
Audio Intercom Audio Headset	Line level. Headset level with dynamic microphone. Volume control with push button
Sizes	175mm x 215mm x 42mm, with Kodak holder screw on bottom and tripod lock on top

Remote side



Hybrid OPTICAL	Fischer FOH2-2 R13 plug, Fischer Fiber Optic Hybrid cable : FOH2-2 P01 +48V DC on copper wire Fiber length : over 200 meters
SDI In/Out	3G/HD-SDI – SMPTE292M, SMPTE 424M
Genlock	CVBS
Serial Remote 1, 2, 3	2 female SubD9 plug for serial connexions with Remote (such as: SONY RM-B150) 1 x MiniDIN6 connexion with Remote (such as: JVC RM-LP20)
LANC Remote	Mini jack plug (stereo) Ø2.5 mm
Tally input	Male SubD9 plug. Tally Red, Tally Yellow
100-240V AC 50/60Hz	Worldwide IEC power plug
Audio Intercom Audio Headset	Line level. XLR In, XLR Out Headset XLR In/Out (Line level)
Sizes	19" rack x 280 mm x 1U high